

**High purity**

**High rigidity**

**High hardness**

**High strength**

**Wear resistance**


**Heat resistance**

**Chemical resistance**

**Plasma resistance**

**Thermal conductivity**

# Ferrotec Global Network

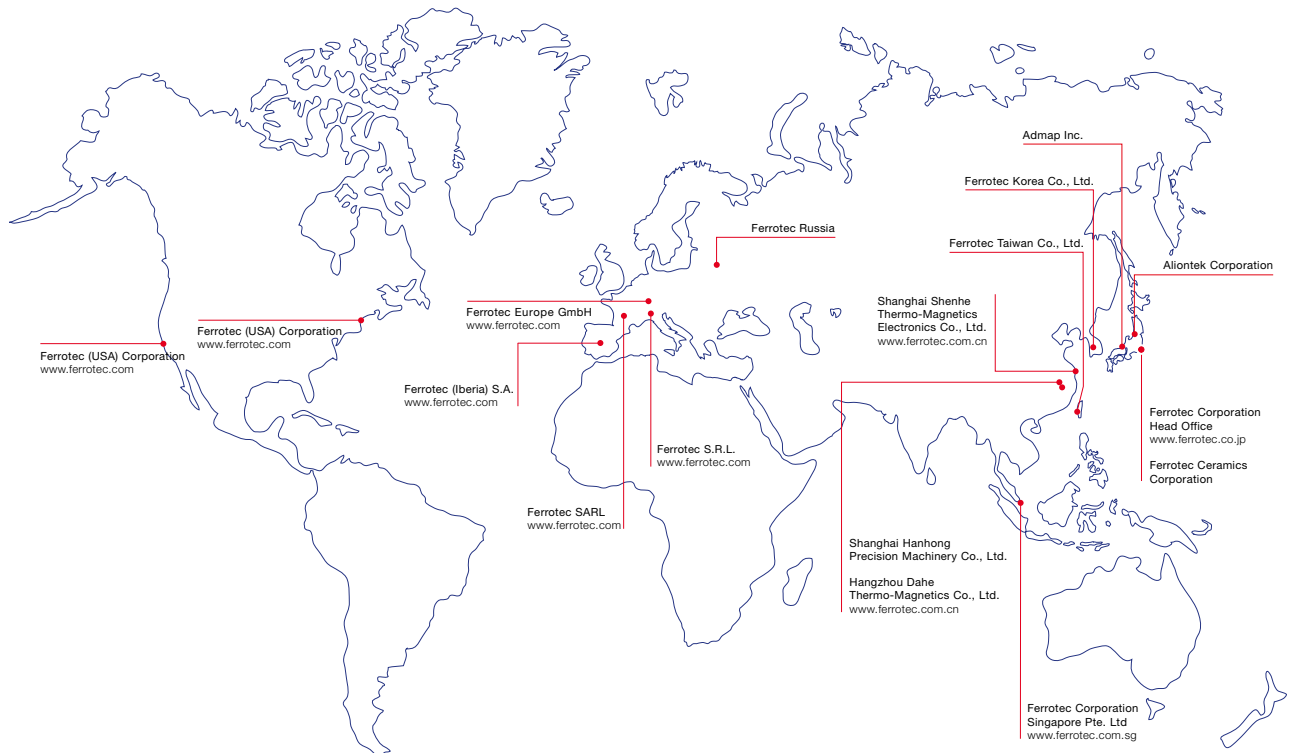

Ferrotec ceramics was founded as a manufacturer of machinable ceramics in 1984 and is headquartered in Tokyo, Japan. In 1998, we acquired the fine ceramics business of Sumitomo Metal Industries, and now lead the ceramics industry for structured ceramics in semiconductor processes and inspection equipment. In addition, from 2008, we have advanced our global business under the Ferrotec group using our international sales network (USA, Europe and Asia) and overseas production capability in China.

As a leading manufacturer of a broad range of high purity advanced ceramic materials, Ferrotec fabricates precision

parts and components for a variety of applications and industries including semiconductor processing equipment, integrated circuit testing and medical diagnostic systems.

Ferrotec offers a considerable product line of high-tech ceramics and extensive fabrication, processing and high precision machining capabilities as our core competencies. We have divided our ceramic manufacturing into three materials categories. Advanced FINE CERAMICS with high structural properties, MACHINABLE CERAMICS (Photoveel series) enabling outstanding precision features and MMC (Metal Matrix Composites) materials, which offer unique properties due to

the combination of metallic and ceramic materials.

We manufacture our own ceramic materials, so we have a thorough understanding of ceramics and our material expertise will help guide you to your optimal material. Whether you are developing a new component, exploring new materials for an existing component or you are looking for manufacturing alternatives on an existing ceramic design, we specialize in fabricating custom ceramic parts for your designs and applications.

# Material Properties and Characteristics

Fine Ceramics										
Material			Alumina (Al <sub>2</sub> O <sub>3</sub> )							
Material code			AS999	AT999	ACM998	AM997	AM997QII	ACM96		
General Properties	Main component purity		wt%	99,99	99,9	99,8	99,7	99,7	96	
	Color			White	–	Whitish yellow	Whitish yellow	–	White	
	Density		g/cm <sup>3</sup>	3,95	3,92	3,93	3,93	3,93	3,74	
	Water Absorption		%	0	0	0	0	0	0	
Mechanical Properties	Bending Strength		MPa	390	400	370	390	390	350	
	Young's Modulus		GPa	380	385	370	375	385	320	
	Vickers Hardness		GPa	18	16	16	18	17	14	
Thermal Properties	Max. Operating Temperature		°C	1600	1600	1600	1600	1600	–	
	Coefficient of Thermal Expansion	RT~500°C	1/°C(×10 <sup>-6</sup> )	7,0	7,9	7,2	7,0	7,0	7,2	
	Coefficient of Thermal Conductivity		W/m·K	33	34	32	33	33	24	
	Thermal Shock Resistance		ΔT(°C)	200	200	250	200	200	200	
Electrical Properties	Volume Resistivity	25 °C	Ω·m	10 <sup>15</sup>	10 <sup>15</sup>	10 <sup>14</sup>	10 <sup>16</sup>	10 <sup>15</sup>	10 <sup>15</sup>	
		300 °C		10 <sup>12</sup>	10 <sup>14</sup>	10 <sup>14</sup>	10 <sup>13</sup>	10 <sup>14</sup>	10 <sup>9</sup>	
		500 °C		10 <sup>9</sup>	10 <sup>11</sup>	10 <sup>10</sup>	10 <sup>10</sup>	10 <sup>12</sup>	10 <sup>7</sup>	
		800 °C		10 <sup>7</sup>	10 <sup>6</sup>	10 <sup>6</sup>	10 <sup>9</sup>	10 <sup>5</sup>	10 <sup>5</sup>	
	Dielectric Constant		10 GHz		9,9	9,8	9,9	9,7	9,7	9,4
	Dielectric Loss (tan δ)			10 <sup>-4</sup>	0,5	4	10	1	0,15	38
	Q Factor (1/tan δ)			10 <sup>4</sup>	2	0,25	0,1	1	6,7	0,03
Dielectric Breakdown Voltage		kV/mm		18	17	15	18	18	14	
<b>Main Characteristics</b>										
▼ Low ▲ High			<b>96%–99.99% purity</b> ▼ Price ▲ Purity ▲ Electrical insulation ▲ Hardness ▲ Heat resistance ▲ Wear resistance ▲ Plasma resistance ▲ Corrosion resistance							

The chart is intended to illustrate typical mechanical properties of test specimens. Property values may vary according to manufacturing process.

Silicon Nitride (Si <sub>3</sub> N <sub>4</sub> )	Silicon Carbide (SiC)	Aluminum Nitride (AlN)	Zirconia (ZrO <sub>2</sub> )	Low thermal expansion ceramics
<b>SN606</b>	<b>SC902E</b>	<b>ALN94</b>	<b>YZT 94</b>	<b>LE101</b>
90	97	94	-	-
Gray	Black	Light gray	Whitish yellow	Gray
3,16	3,15	3,31	≥ 6.0	2,55
0	0	0	0	0
750	490	345	>1000	200
285	400	320	205	140
16	22	11	>12	-
1200	1600	1000	-	-
2,7	3,8	4,4	9,6	<0.5
23	170	150	3	-
700	300	400	300	-
10 <sup>16</sup>	10 <sup>4</sup>	10 <sup>14</sup>	10 <sup>14</sup>	10 <sup>14</sup>
-	10 <sup>2</sup>	10 <sup>10</sup>	-	10 <sup>12</sup>
-	10	10 <sup>7</sup>	-	10 <sup>10</sup>
-	10	10 <sup>5</sup>	-	10 <sup>6</sup>
8	-	8,5	33	4,9
6,1	-	30	520	5
0,16	-	0,03	0,002	0,2
14	-	15	11	23

<ul style="list-style-type: none"> <li>▲ Thermal shock resistance</li> <li>▲ Toughness</li> <li>▲ Heat resistance</li> <li>▲ High (temp.) strength</li> </ul>	<ul style="list-style-type: none"> <li>▲ Hardness</li> <li>▲ Wear resistance</li> <li>▲ Rigidity</li> <li>▲ High (temp.) strength</li> <li>▲ Thermal conductivity</li> <li>▲ Corrosion resistance</li> <li>▲ Plasma resistance</li> </ul>	<ul style="list-style-type: none"> <li>▲ Thermal conductivity</li> <li>▲ Heat radiation</li> <li>▼ Density</li> <li>▲ Plasma resistance</li> </ul>	<ul style="list-style-type: none"> <li>▲ Strength</li> <li>▲ Toughness</li> <li>● CTE ~10x10<sup>-6</sup> 1/K</li> </ul>	<ul style="list-style-type: none"> <li>▼ Density</li> <li>▼ Expansion</li> </ul>
---	---	--	--	--

ng process and product configurations.

# Technical Information Ceramics (Standard Tolerances)

Fine Ceramics technical guide				
Dimensions a) b)			min	max
●	diameter	mm	0.4	820
◎	diameter (inner)	mm	0.15	450
■	edge length	mm	1	1500
Dimensional tolerances				
	as sintered	± 1% (min ± 0.3 mm)		
	grinded	according to ISO 2768 m (1989)/JIS B 0405 m		
Shape and positional tolerances				
—	straightness	according to ISO 1101 (2012)		
▬	flatness	according to ISO 1101 (2012)		
⊥	perpendicularity	according to ISO 1101 (2012)		
≡	parallelism	according to ISO 1101 (2012)		
Surface roughness				
▼▼▼▼	precision machining	according to ISO 4287(1997)/JIS B 0601		
▼▼	general machining	according to ISO 4287(1997)/JIS B 0601		
Surface modification				
	mechanical machining	grinding, lapping, polishing, blasting		
	laser machining	marking		
	bonding	resin, glass, Cu metalization		
	coating (thin film)	Al <sub>2</sub> O <sub>3</sub> , SiC, TiN, TiC, DLC, Ag, Ni, Au		

a) forming technology dependent

b) material dependent

ISO 2768 m (1989)	
Dimensions [mm]	Tolerance [mm]
0,5–3	± 0.1
> 3–6	± 0.1
> 6–30	± 0.2
> 30–120	± 0.3
> 120–400	± 0.5
> 400–1000	± 0.8


ISO 1101 (2012)	
Dimensions [mm]	Tolerance [mm]
to 100	0.4
> 100–300	0.6
> 300–1000	0.8

ISO 1101 (2012) – □ //	
Dimensions [mm]	Tolerance [mm]
to 10	0.05
> 10–30	0.1
> 30–100	0.2
> 100–300	0.4
> 300–1000	0.6

ISO 4287(1997)		
Ra [μm]	Rmax [μm]	
0.2	0.2	0.8
1.6	1.6	6.3
6.3	6.3	25
25	25	100

smaller tolerances on request

Pure  
Precision™



**Ferrofluidic® Vacuum Seal**



**Welded Metal Bellows**  
Product of KSM Corporation



**Precision Vacuum Coating**



**Contract Manufacturing Services**




**Polycold® Cryogenerators**  
Product of Brooks Automation, Inc.



**Temescal Precision Vacuum Coating Systems**




**Ceramics**




**Metal Matrix Composites**  
Product of Japan Fine Ceramics Co., Ltd.




**Direct Bonded Copper**

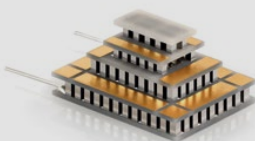

**Thermal Solutions**

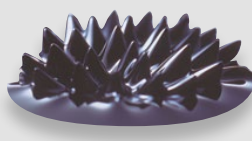

**Ferrofluid**



**Fabricated Quartzware**

**Ferrotec**

**Germany**  
Ferrotec Europe GmbH  
Seerosenstraße 1  
72669 Unterensingen  
Germany  
Tel.: +49-70 22-92 70-0  
Fax: +49-70 22-92 70-10 00  
info@de.ferrotec.com  
www.ferrotec.com

**Japan**  
Ferrotec Ceramics Corporation  
5 F Nihonbashi Building  
2-3-4 Nihonbashi  
Chuo-ku, Tokyo 103-0027  
Japan  
Tel.: +81-3-35 16-08 00  
Fax: +81-3-35 16-08 01  
www.ft-ceramics.co.jp